


**100 000
CYCLES**

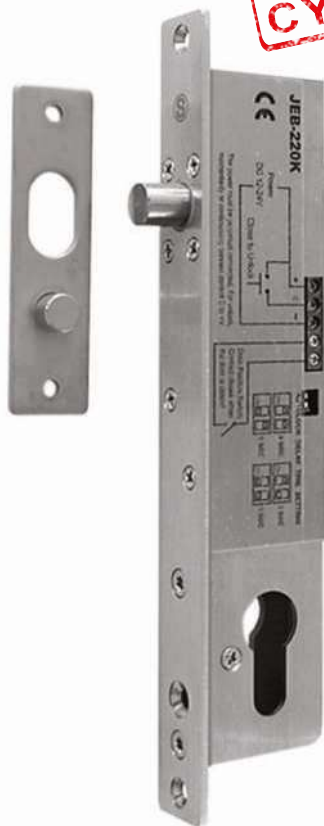


SPECIFICATIONS

- ✓ Electromagnetic bolt NC* (open when powered).
- ✓ The insert allows opening the bolt with a key during a power outage.
- ✓ Indication of door closed and opened status
- ✓ Lockout to prevent activation when the door is in the wrong position.
- ✓ Protection against overvoltage and polarity reversal.
- ✓ Automatic locking.

* Electromagnetic bolt NO (normally open) — made to order (fail safe — locked while powered).

TECHNICAL DATA

Current	12 V DC
Current consumption – startup	700 mA for 12V DC
Current consumption – operation	200 mA for 12V DC
Strength	8700 N
Adjustable closing delay	0, 3, 6, 9 sec.

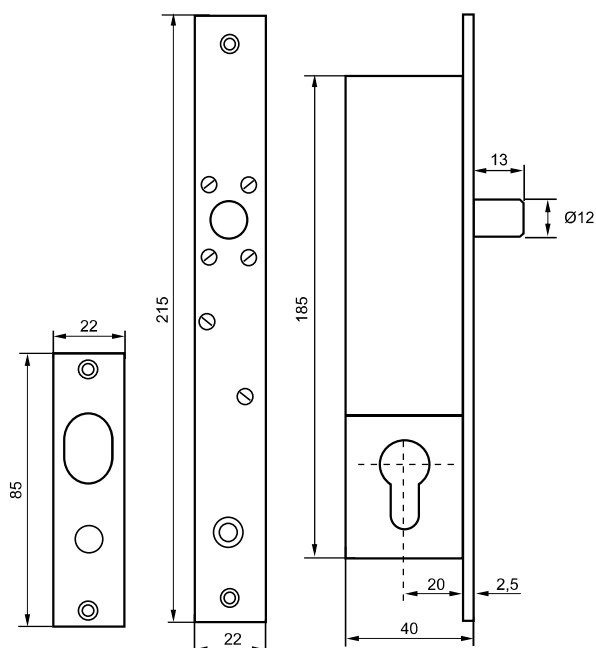

Recommended faceplates: 900, 901, 902, 903, 913