

SLIM




SPECIFICATION

- ✓ Uniwersal (left and right)
- ✓ Symmetrical, slim
- ✓ Intended for use in narrow profiles
- ✓ Height 67 mm, width 16,5 mm
- ✓ Fail - secure (NC) and fail-safe (NO) models
- ✓ Assembling screws distance 52,5 mm
- ✓ Latch adjustment - 4 mm
- ✓ Power supply: 6, 12, 24, 48 V AC/DC.
- ✓ Low power consumption
- ✓ Durability: 200 000 cycles
- ✓ Usage category – class 3 – suitable for public buildings.
- ✓ Certificate of Conformity acc. to EN 14846

ELECTRIC STRIKES

TECHNICAL DATA

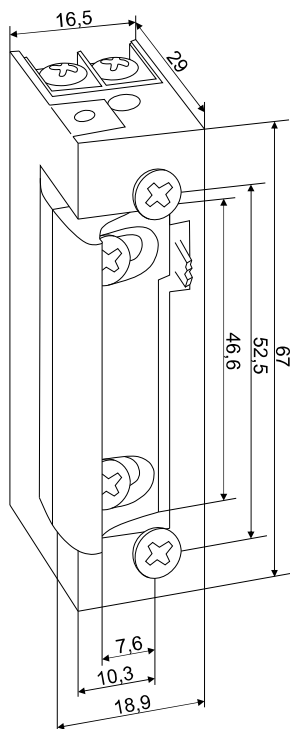

Model			Switch	Memory
Standard	Low voltage	Revers		
1410	1418	1411		
1420	1428	1421	✓	
1433	1438	-		✓
1443	1448	-	✓	✓

Electrical power (V)	6-12V AC/DC standard	12-24V AC/DC standard	12-24V AC/DC low voltage 12V	24-48V AC/DC low voltage 24V	12V DC rewers	24V DC rewers
Range (%)	± 5 %					
Continuous duty	< 1 min.	< 1 min.	100 % 12V DC <1 min. 12V AC <1 min. 24V AC/DC	100 % 24V DC <1 min. 24V AC <1 min. 48V AC/DC	100 %	100 %
Resistance (Ω)	8,5	20	40	140	40	140
Consumption DC (mA)	6V / 700 12V / 1400	12V / 600 24V / 1100	12V / 300 24V / 600	24V / 170 48V / 340	12V / 300 -	24V / 170 -
Consumption AC (mA)	6V / 600 12V / 1200	12V / 500 24V / 1000	12V / 250 24V / 510	24V / 150 48V / 300	-	-
Preload DC (N)	10	10	10	10	10	10
Preload AC (N)	90	90	90	90	-	-

For multi-residential houses access control we recommend models with external automatism (option)



Recomendet front plates: 909, 910, CE196E