

**REINFORCED**  
**1000 KG**




## SPECIFICATION

- ✓ Reinforced – strength up to 1000 kg
- ✓ Universal (left and right)
- ✓ Symmetrical
- ✓ Height: 85 mm, width: 21.5 mm
- ✓ Fail-secure and fail-safe versions
- ✓ Mounting screw spacing: 52 mm
- ✓ Power supply: 6, 12, 24, 48 V AC/DC
- ✓ Low or ultra-low power consumption
- ✓ Operating temperature for fail-safe electric strikes: 60°C

ELECTRIC STRIKES

## TECHNICAL DATA

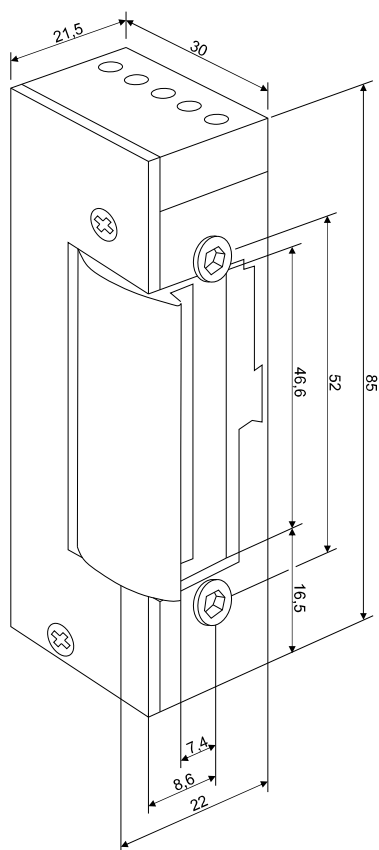

| Model    |             |        | Monitoring |
|----------|-------------|--------|------------|
| Standard | Low voltage | Revers |            |
| 1510     | 1518        | 1511   |            |
| 1560     | 1568        | 1561   | ✓          |

| Electrical power (V) | 6-12V AC/DC standard   | 12-24V AC/DC standard   | 12-24V AC/DC low voltage 12V                        | 24-48V AC/DC low voltage 24V                        | 12V DC revers  | 24V DC revers  |
|----------------------|------------------------|-------------------------|-----------------------------------------------------|-----------------------------------------------------|----------------|----------------|
| Range (%)            | ± 5 %                  |                         |                                                     |                                                     |                |                |
| Continuous duty      | < 1 min.               | < 1 min.                | 100 % 12V DC<br><1 min. 12V AC<br><1 min. 24V AC/DC | 100 % 24V DC<br><1 min. 24V AC<br><1 min. 48V AC/DC | 100 %          | 100 %          |
| Resistance (Ω)       | 8,5                    | 15                      | 40                                                  | 140                                                 | 40             | 140            |
| Consumption DC (mA)  | 6V / 700<br>12V / 1400 | 12V / 680<br>24V / 1080 | 12V / 300<br>24V / 600                              | 24V / 170<br>48V / 340                              | 12V / 300<br>- | 24V / 170<br>- |
| Consumption AC (mA)  | 6V / 600<br>12V / 1200 | 12V / 570<br>24V / 1170 | 12V / 250<br>24V / 510                              | 24V / 150<br>48V / 300                              | -              | -              |
| Preload DC (N)       | 10                     | 10                      | 10                                                  | 10                                                  | 10             | 10             |
| Preload AC (N)       | 90                     | 90                      | 90                                                  | 90                                                  | -              | -              |

Recommended faceplates: 900; 901; 902; 904; 903; 913