




SPECIFICATION

- ✓ Acoustic opening signal
- ✓ Universal (left and right)
- ✓ Height: 77 mm, width: 20.5 mm
- ✓ Suitable for narrow profiles
- ✓ Fail-secure NC version
- ✓ Mounting screw spacing: 52 mm
- ✓ Latch adjustment: 4 mm
- ✓ Power supply: 12–24 V DC
- ✓ Durability: 200,000 cycles
- ✓ Usage category – Class 3, suitable for public buildings
- ✓ Certified according to PN-EN 14846:2010

*In this model, the polarity of wire connection (+/–) matters.

TECHNICAL DATA

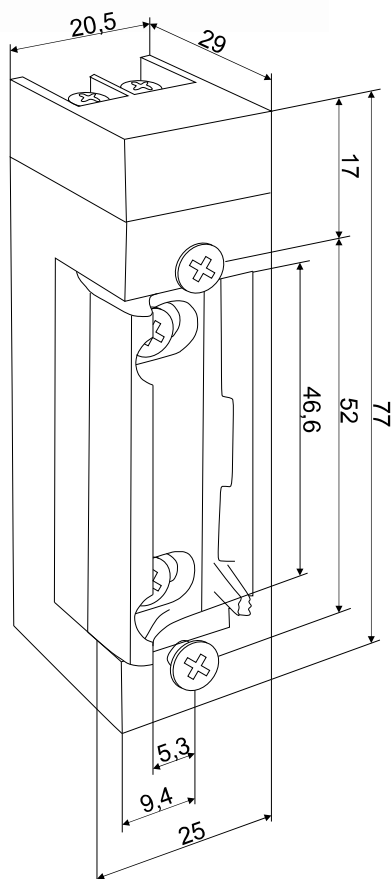

Model	Switch	Memory
Standard		
1710 BB		
1720 BB	✓	
1733 BB		✓
1743 BB	✓	✓

Electrical power (V)	12-24V DC
Range (%)	± 5 %
Continuous duty	< 1 min.
Resistance (Ω)	20
Consumption DC (mA)	12V / 600 24V / 1100
Preload DC (N)	10

Recommended faceplates: 900; 901; 902; 903; 913.