



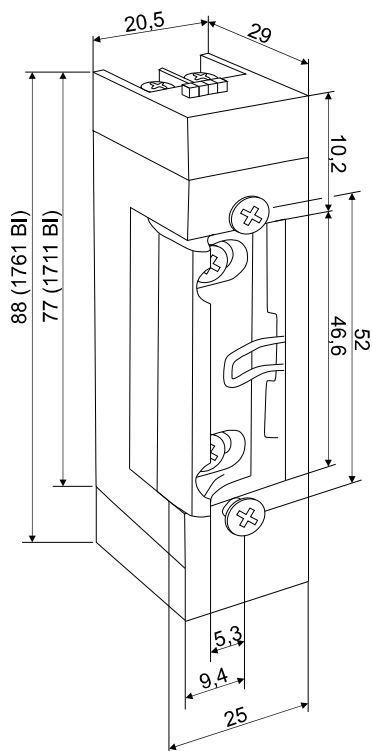

DUAL VOLTAGE
REVERS



SPECIFICATION

- ✓ Dual voltage
- ✓ Monitoring - 1761 BI.
- ✓ Maximum microswitch load: AC (125V) – 3A / DC (30V) – 2A
- ✓ Universal (left and right)
- ✓ Suitable for narrow profiles
- ✓ Fail-safe NO version
- ✓ Mounting screw spacing: 52 mm
- ✓ Latch adjustment: 4 mm
- ✓ Power supply selectable by jumper: 12 V or 24 V DC
- ✓ Low or ultra-low power consumption
- ✓ Durability: 200,000 cycles
- ✓ Usage category – Class 3, suitable for public buildings
- ✓ Certified according to PN-EN 14846:2010

TECHNICAL DATA

Model	Monitoring
Revers	
1711 BI	
1761 BI	✓

Electrical power (V)	12-24V DC revers
Range (%)	± 5 %
Continuous duty	100% 12V DC 100% 24V DC
Resistance (Ω)	45/180
Consumption DC (mA)	12V / 260 24V / 130
Preload DC (N)	10
Operating temperature	12V DC = 58 °C 24V DC = 62 °C

Recommended faceplates: 900; 901; 902; 903; 913.