

MONITORING




SPECIFICATION

- ✓ Universal (left and right), symmetrical
- ✓ With monitoring
- ✓ Maximum microswitch load: AC (125V) – 3A / DC (30V) – 2A
- ✓ Suitable for narrow profiles
- ✓ Height: 78.5 mm, width: 20.5 mm
- ✓ Fail-secure NC and fail-safe NO versions
- ✓ Mounting screw spacing: 52 mm
- ✓ Latch adjustment: 4 mm
- ✓ Power supply: 6, 12, 24, 48 V AC/DC
- ✓ Low or ultra-low power consumption
- ✓ Durability: 200,000 cycles
- ✓ Usage category – Class 3, suitable for public buildings
- ✓ Certified according to PN-EN 14846:2010

ELECTRIC STRIKES

TECHNICAL DATA

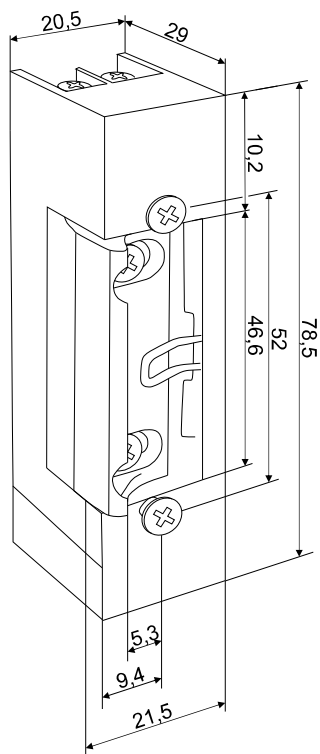

Model			Monitoring
Standard	Low voltage	Revers	
1760	1768	1761	✓

Electrical power (V)	6-12V AC/DC standard	12-24V AC/DC standard	12-24V AC/DC low voltage 12V	24-48V AC/DC low voltage 24V	12V DC revers	24V DC revers
Range (%)	± 5 %					
Continuous duty	< 1 min.	< 1 min.	100 % 12V DC <1 min. 12V AC <1 min. 24V AC/DC	100 % 24V DC <1 min. 24V AC <1 min. 48V AC/DC	100 %	100 %
Resistance (Ω)	8,5	20	40	150	60	150
Consumption DC (mA)	6V / 700 12V / 1400	12V / 600 24V / 1100	12V / 300 24V / 600	24V / 160 48V / 320	12V / 200 -	24V / 160 -
Consumption AC (mA)	6V / 600 12V / 1200	12V / 500 24V / 1000	12V / 250 24V / 510	24V / 130 48V / 270	-	-
Preload DC (N)	10	10	10	10	10	10
Preload AC (N)	90	90	90	90	-	-

Recommended faceplates: 900; 901; 902; 904; 906; 907; 908; 903; 913; 905; 915; seria CE196E

ONLINE SHOPPING PLATFORM 24H WWW.LUCZNIK.COM.PL