

**SYMETRICAL
WITH BEVEL**




SPECIFICATION

- ✓ Radial latch with beveled lock bolt.
- ✓ Opening with minimal deflection, installation without cutting the door frame.
- ✓ Universal (left and right).
- ✓ Symmetrical, narrow design.
- ✓ Suitable for narrow profiles.
- ✓ Fail-secure NC and fail-safe NO versions.
- ✓ Latch adjustment by 2 or 1 mm.
- ✓ Models designed for continuous operation.
- ✓ Low power consumption.
- ✓ Durability: 200,000 cycles.
- ✓ Usage category – Class 3, suitable for public buildings.
- ✓ Certified according to PN-EN 14846:2010.



Option available upon customer request with reinforced increasing spring permissible preload

TECHNICAL DATA

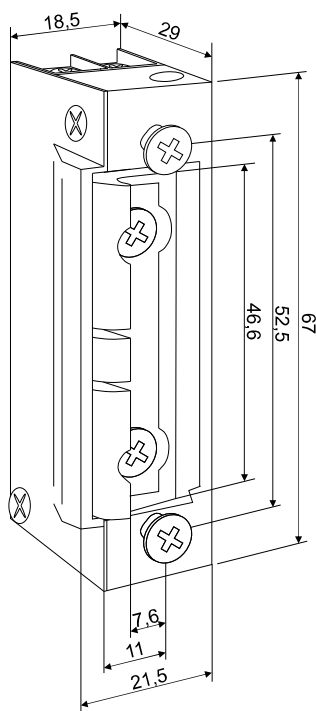


Model			Switch	Memory
Standard	Low voltage	Revers		
4010 RFT	4018 RFT	4011 RFT		
4020 RFT	4028 RFT	4021 RFT	✓	
4033 RFT	4038 RFT	-		✓
4043 RFT	4048 RFT	-	✓	✓

Electrical power (V)	6-12V AC/DC standard	12-24V AC/DC standard	12-24V AC/DC low voltage 12V	24-48V AC/DC low voltage 24V	12V DC revers	24V DC revers
Range (%)	± 5 %					
Continuous duty	< 1 min.	< 1 min.	100 % 12V DC < 1 min. 12V AC < 1 min. 24V AC/DC	100 % 24V DC < 1 min. 24V AC < 1 min. 48V AC/DC	100 %	100 %
Resistance (Ω)	8,5	15	40	140	40	140
Consumption DC (mA)	6V / 700 12V / 1400	12V / 680 24V / 1080	12V / 300 24V / 600	24V / 170 48V / 340	12V / 300 -	24V / 170 -
Consumption AC (mA)	6V / 600 12V / 1200	12V / 570 24V / 1170	12V / 250 24V / 510	24V / 150 48V / 300	-	-
Preload DC (N)	10	10	10	10	10	10
Preload AC (N)	90	90	90	90	-	-



For multi-residential houses access control we recommend models with external automatism (option)

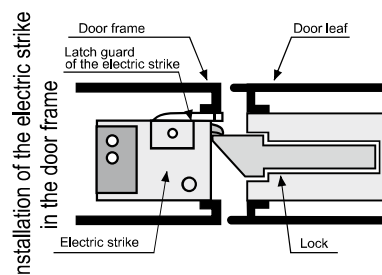

Recommended faceplates:

902EP/28-RFT, 902EL/28-RFT, 902EP/A/24RFT, 902EL/A/24-RFT, 900X/A/25-RFT oraz CE 196E/6U-RFT