

BASIC




SPECIFICATION

- ✓ Uniwersal (left and right)
- ✓ Asymmetrical
- ✓ Height 90 mm.
- ✓ Fail - secure (NC)
- ✓ Assembling screws distance 52 mm
- ✓ Power supply: 12 - 24 V AC/DC.
- ✓ Low power consumption
- ✓ Durability: 200 000 cycles
- ✓ Category of use - class 3 - suitable for public buildings
- ✓ Certificate of Conformity acc. to EN 14846

ELECTRIC STRIKES

TECHNICAL DATA

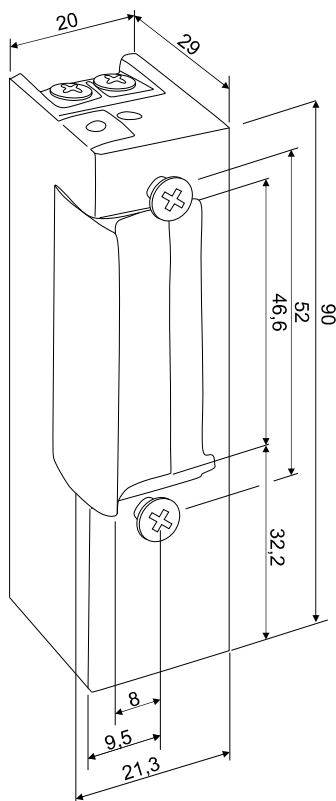

Model	Switch	Memory
Low current		
810		
820	✓	
833		✓
843	✓	✓

Electrical power (V)	12-24V AC/DC low voltage 12V
Range (%)	± 5 %
Continuous duty	100 % 12V DC <1 min. 12V AC <1 min. 24V AC/DC
Resistance (Ω)	40
Consumption DC (mA)	12V / 300 24V / 600
Consumption AC (mA)	12V / 250 24V / 510
Preload DC (N)	10
Preload AC (N)	90

Recomendet front plates : 900, 901, 902, 903, 913